




Technical Data

- Setting Range from 1 up to 110A
- Self Powered
- Thermal memory
- Phase Loss Protection
- Phase Unbalance Protection
- Direct Fitting to Contactors LSK
- Multiple Trip Class Selection
Trip Classes 5 - 10 - 20 - 30
- Manual / Auto Reset
- Increased Flexibility, Less Order Codes, Less Stock
- 3 Phase, 1 Phase possible by adding wire jumper from T2 to L3

Part #	RE1K	RE1S	RE2M
Amp Range	1.0 - 5.0A	6.4 - 32.0A	22.0 - 110A
Attachable to Contactor	LS5K	LS15K	LS55K
List Price	\$107	\$118	\$200

Seperate Mtg. Adaptor Part#	RE1XP	RE2XP
List Price	\$12	\$24

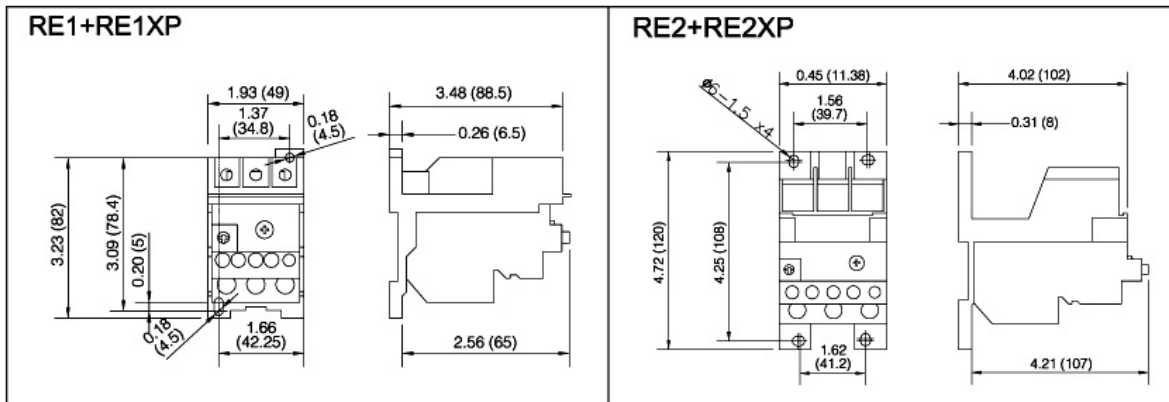

AC MOTOR STARTERS w/ Electronic Overload

3 Phase Full Voltage-Across the Line

AC-3	Horse Power (UL) Ratings 3 Phase Motor Max UL Volt HP		OPEN	ENCLOSED				
				NEMA 1 General Purpose	NEMA 4X Outdoor (non-metal)	NEMA 4 (metal)	NEMA 3R (metal)	NEMA 12 Dust Tight (metal)
5	200V	1 HP	XLS5K	XLS5K	XLS5K	XLS5K	XLS5K	XLS5K
	230V	1 HP	-*0-RE1K	-*1-RE1K	-*4x-RE1K	-*4-RE1K	-*3R-RE1K	-*12-RE1K
	460V	3 HP						
	600V	5 HP	\$194	\$268	\$319	\$339	\$299	\$299
32	200V	10 HP	XLS15K	XLS15K	XLS15K	XLS15K	XLS15K	XLS15K
	230V	10 HP	-*0-RE1S	-*1-RE1S	-*4x-RE1S	-*4-RE1S	-*3R-RE1S	-*12-RE1S
	460V	20 HP						
	600V	25 HP	\$273	\$344	\$398	\$408	\$368	\$368
105	200V	30 HP	XLS55K	XLS55K	XLS55K	XLS55K	XLS55K	XLS55K
	230V	40 HP	-*0-RE2M	-*1-RE2M	-*4x-RE2M	-*4-RE2M	-*3R-RE2M	-*12-RE2M
	460V	75 HP						
	600V	75 HP	\$670	\$822	\$1,347	\$1,577	\$1,377	\$1,377



* Coil Suffix Chart

AC	60Hz	50Hz
-G	24	24
-A	120	120
-B	200	200
-C	220	220
-H	277	230
-E	480	380
-F	600	500

DC Coil See \$ adder below

-MSW	12 VDC
-NSW	24 VDC
-OSW	48 VDC
-PSW	110 VDC
-RSW	220 VDC

XLS5K	Add \$30 to list
XLS15K	Add \$60 to list
XLS55K	Add \$60 to list

Add "S" to beginning of part # for single phase. Example: SXLS5K-AO-RE1K