


Design Features

- cUL_{us} / UL 508, 508E & UL508 Type E Listed
- Class 10 Overload Trip
- Adjustable Thermal Protection 0-63 Amps
- Ambient temperature compensated (-20°C - +60°C) - 4.0°F - +140°F
- Common Accessories for MBS32 & MBS63 Motor Switches
- Single phase sensitivity
- Short circuit protection (50kA)
- Tamper Proof - Cover over adjustment dial
- Identification marker plate

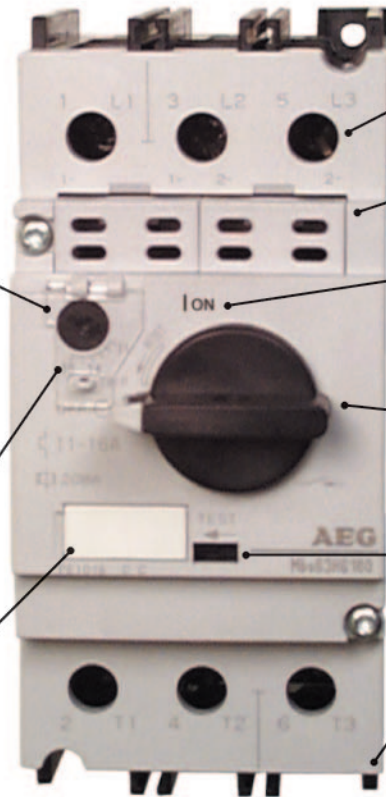

- 50kA - IC MBS32HG / MBS63HG
- Finger Safe Pressure Wire screw terminals
- Front & Side Mount Auxiliaries
- Clear indication (OFF/TRIP/ON) Operator handle
- Padlockable OFF Operator (Lockout / Tagout) Safety Requirement
- Test Trip Function
- 35mm Din rail mount or Screw Mount
- Type 2 Coordination

Enclosure Accessories for MBS32 SG Models ONLY.



Padlocking device up to 3 padlocks

Catalog Number: **MID**

Pilot Light Kits



Catalog Number: **MI55**
Surface Mount

MIT55
Flush Mount

Emergency mushroom pushbutton kits



Momentary P/N (MIPM)



Maintained Twist Release P/N (MIPL)



Maintained Key Release P/N (MIPK)

Catalog Number:

MIPM / MIPL / MIPK

IP55

Water-tight, Dust-tight Enclosure used for NEMA 1,3R & 12 applications

See page 105, 107 for ordering details.