

Standards / Approvals




IEC 60947-1, 60947-2, 60947-4-1
DIN VDE 0600T 100/101/102
UL508E
Shipboard approvals (on request)
PTB test (on request)

Product range of Accessories

- Auxiliary contacts (frontal & lateral)
- Alarm contact block
- Auxiliary and alarm contact block
- Short-circuit alarm contact block
- Undervoltage release
- Undervoltage release with 2NO early make contacts
- Shunt Trip Device

Auxiliaries

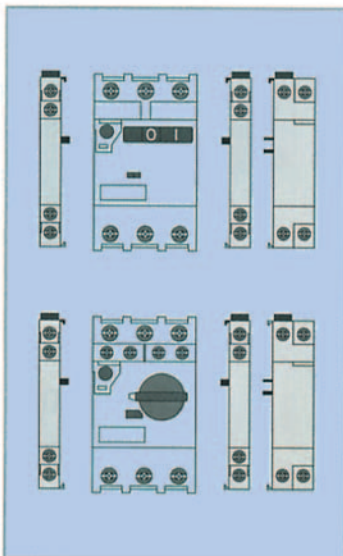

Technical performances

- All auxiliaries can be mounted and changed easily, without any tools
- Both frames MBS32 and MBS63 use same auxiliaries
- All terminals are capable for 2 cables (0.5mm² - 2.5mm²)
- Side auxiliary contacts are rated to A600, P300 duty
- Frontal auxiliary contacts are rated to B300, Q300 duty
- Minimum operational contact 5mA, 17Vdc
- All terminal screwhead are Pozidriv 2 and slotted combination

Accessories

- Auxiliaries (page 109 and 110.)
- Combination Components (page 115, 114)
- Technical data (page 103)