


# TEC Starter Dimensions

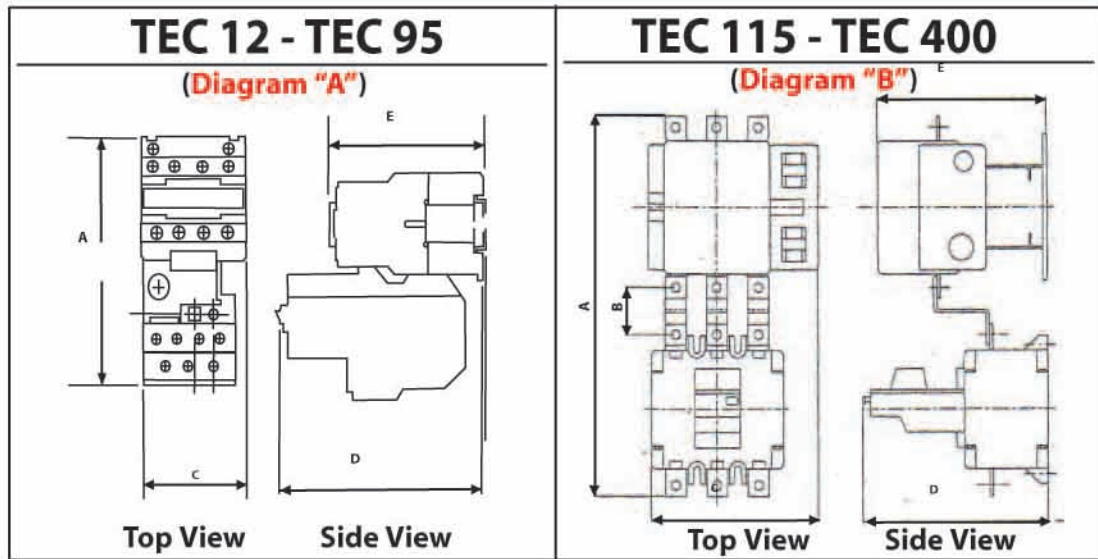

**Dimension Details For TEC12-TEC95 / Direct Mount**

A- Diagram mm (inches)	TEC 12	TEC 18	TEC 25	TEC 32	TEC 40-50-65	TEC 80	TEC 95
A	118 (4.7")	118 (4.7")	129 (5.08")	140 (5.51")	175 (6.89")	179 (7.05")	179 (7.05")
B	NA	NA	NA	NA	NA	NA	NA
C	45 (1.77")	45 (1.77")	56 (2.2")	56 (2.2")	75 (2.95")	82 (3.23")	82 (3.23")
D	98 (3.86")	98 (3.86")	110 (4.33")	100 (3.94")	125 (4.92")	128 (5.04")	128 (5.04")
E (AC)	80 (3.15")	85 (3.35")	95 (3.74")	100 (3.94")	115 (4.53")	120 (4.72")	120 (4.72")
E (DC)	115 (4.5")	120 (4.72")	130 (5.1")	135 (5.31")	171 (6.7")	181 (7.13")	NO DC

**Dimension Details For TEC115-TEC400 / With Overload Range of (105A - 200AMP)**

B- Diagram mm (inches)	TEC 115	TEC 150	TEC 185	TEC 225	TEC 265	TEC 330	TEC 400
A	345 (13.6")	351 (13.8")	354 (13.9")	375 (14.8")	381 (15.0")	384 (15.1")	384 (15.1")
B	40 (1.57")	40 (1.57")	40 (1.57")	40 (1.57")	40 (1.57")	40 (1.57")	40 (1.57")
C	160 (6.3")	164 (6.5")	169 (6.7")	169 (6.7")	196 (7.7")	204 (8.0")	207 (8.2")
D	180 (7.1")	180 (7.1")	180 (7.1")	180 (7.1")	180 (7.1")	180 (7.1")	180 (7.1")
E (AC/DC)	165 (6.5")	165 (6.5")	176 (6.9")	176 (6.9")	207 (8.2")	213 (8.4")	213 (8.4")

**Dimension Details For TEC115-TEC400 / With Overload Range of (250A - 400AMP)**

B- Diagram mm (inches)	TEC 185	TEC 225	TEC 265	TEC 330	TEC 400
A	374 (15.5")	394 (15.51")	400 (15.8")	403 (15.9")	403 (15.9")
B	40 (1.57")	40 (1.57")	40 (1.57")	40 (1.57")	40 (1.57")
C	185 (7.3")	185 (7.3")	200 (7.9")	208 (8.2")	208 (8.2")
D	219 (8.6")	219 (8.6")	219 (8.6")	219 (8.6")	219 (8.6")
E (AC/DC)	176 (6.9")	176 (6.9")	207 (8.2")	213 (8.4")	213 (8.4")

\*NA = Not Applicable ( Direct Mount)

\*All Dimensions are Approximate MM (Inches)

\*Above Dimensions **Do Not** Include Lugs Dimensions for sizes TEC 115 - TEC 400.

Add Approx 1" to top & Bottom Dimensions for this.