

## SERIES GSA SWD POWER SUPPLY (Single Phase) 24 VOLT DC OUTPUT

**DIN RAIL MOUNT**                      **1.25 Amp to 20 Amp**  
**COMPACT SIZE**                        **30 Watt to 480 Watt**  
**REGULATED OUTPUT**



### FEATURES

Single phase input  
Wide Input Range 100-240 VAC





### SPECIFICATIONS

Input Voltage	100 - 240 VAC
Frequency	47 - 63 Hz
Output voltage	Select: 24 VDC
Output voltage adj.	-5 +15%
Temperature rating	-10°C + 50°C
Approvals	01, 02 - UL1950, UL508 Listed, Class 2 05, 10, 20 - UL508 Listed
Protection	Internal Fuse T2A / 250VAC
Connection	01, 02 Quick Connect Terminals 05, 10, 20 Screw Clamp Terminal

Selection	GSA SWD 01	GSA SWD 02	GSA SWD 05	GSA SWD 10	GSA SWD 20
Catalog Number	D 0023 01	D 0023 02	D 0023 05	D 0023 10	D 0023 20
List Each	\$65	\$70	\$110	\$150	\$305
Output Voltage	<u>24VDC</u>	<u>24VDC</u>	<u>24VDC</u>	<u>24VDC</u>	<u>24VDC</u>
Output Current	1.25A	2.5A	5A	10A	20A
Noise in mV	50	50	50	100	100
Dimensions approx. mm Inch	H    W    D 90    40    115 (3.5") (1.6") (4.5")	H    W    D 90    40    115 (3.5") (1.6") (4.5")	H    W    D 125   63   126 (4.9") (2.5") (5.0")	H    W    D 125   83   126 (4.9") (3.3") (5.0")	H    W    D 125   175   116 (4.9") (6.9") (4.6")



**Din  
Rail Mount**

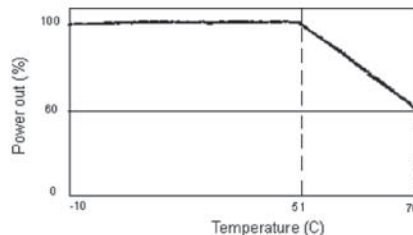

Discount Schedule: DE