


Type RECX Reversing AC Contactors

AC-1	AC-3(@380V)	Horse Power Ratings 3 Phase Motor		OPEN	NEMA 1 General Purpose (metal)	NEMA4X Hose Dust Tight (non metal)	NEMA 4/12 (metal)	NEMA 3R Hose + Dust Tight Outdoor (metal)
		Volts	HP					
32A	18A	200V	7 1/2	RECX 18 - *0 \$80.00	RECX 18 - *1 \$173.00	RECX 18 - *4X \$193.00	RECX 18 - *4 \$233.00	RECX 18 - *3R \$233.00
		230V	7 1/2					
		480V	10					
		600V	10					
		Volts	HP					
50A	32A	200V	10	RECX 32 - *0 \$113.00	RECX 32 - *1 \$191.00	RECX 32 - *4X \$215.00	RECX 32 - *4 \$251.00	RECX 32 - *3R \$219.00
		230V	15					
		480V	20					
		600V	20					
		Volts	HP					
80A	65A	200V	20	RECX 65 - *0 \$209.00	RECX 65 - *1 \$274.00	RECX 65 - *4X \$295.00	RECX 65 - *4 \$355.00	RECX 65 - *3R \$327.00
		230V	25					
		480V	40					
		600V	40					
		Volts	HP					
110A	95A	200V	30	RECX 95 - *0 \$349.00	RECX 95 - *1 \$459.00	RECX 95 - *4X \$495.00	RECX 95 - *4 \$497.00	RECX 95 - *3R \$463.00
		230V	30					
		480V	50					
		600V	50					
		Volts	HP					

*Coil Voltage Suffix	
* - Add Suffix	AC Voltage
-A	= 120V
-C	= 230V/208V
-E	= 480V
-F	= 600V
-D	= 380V
-G	= 24V
-H	= 280V

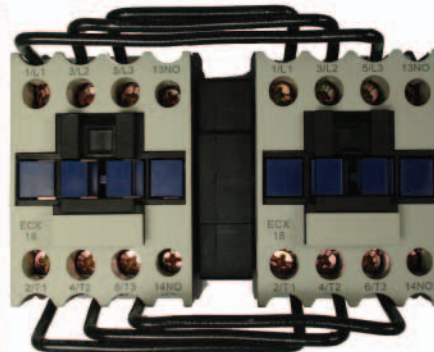

Dimensions for RECX			
mm/inches	H	x W	x D
RECX 18	76 (3.0")	105 (4.13")	87 (3.43")
RECX 32	86 (3.40")	127 (5.00")	100 (3.94")
RECX 65	129 (5.08")	165 (6.50")	116 (4.60")
RECX 95	129 (5.08")	172 (6.77")	127 (5.00")

PART # EXAMPLE :

RECX 18 - A1

RECX = RECX 18 Reversing Contactor

A = 120 VAC Coil

1 = NEMA 1 Enclosure