

**MAXIMUM HORSEPOWER RATINGS FOR 3 PHASE MOTORS**


VOLTAGE (V)	200V	230V	460V	575V
HORSEPOWER	80	75	150	200
MAXIMUM CURRENT	INDUCTIVE (AC3) -- 285A			
	RESISTIVE (AC1) -- 350A			
AUXILIARY CONTACTS	NO	1*		
BUILT-IN	NC	0		

\*THIS ONE NORMALLY OPEN HOLDING CIRCUIT CONTACT IS INCORPORATED IN THE DESIGN OF THE COIL.

**COIL VOLTAGES FOR EEC 500 TO EEC 780**

SUFFIX	VOLTAGE (VAC)	FREQUENCY (Hz)	DC VOLTAGE (VDC)
-A	120	50/60	
-C	208 - 230	60	
-E	480/400	60/50	
-F	600*	60	-DCN = 24VDC
-D	380	50	-DCO = 48VDC
-G	240**	50/60	-DCP = 120VDC
-H	277 - 280	60	-DCR = 220VDC

\* EEC 225 Max  
\*\* EEC 330 Max

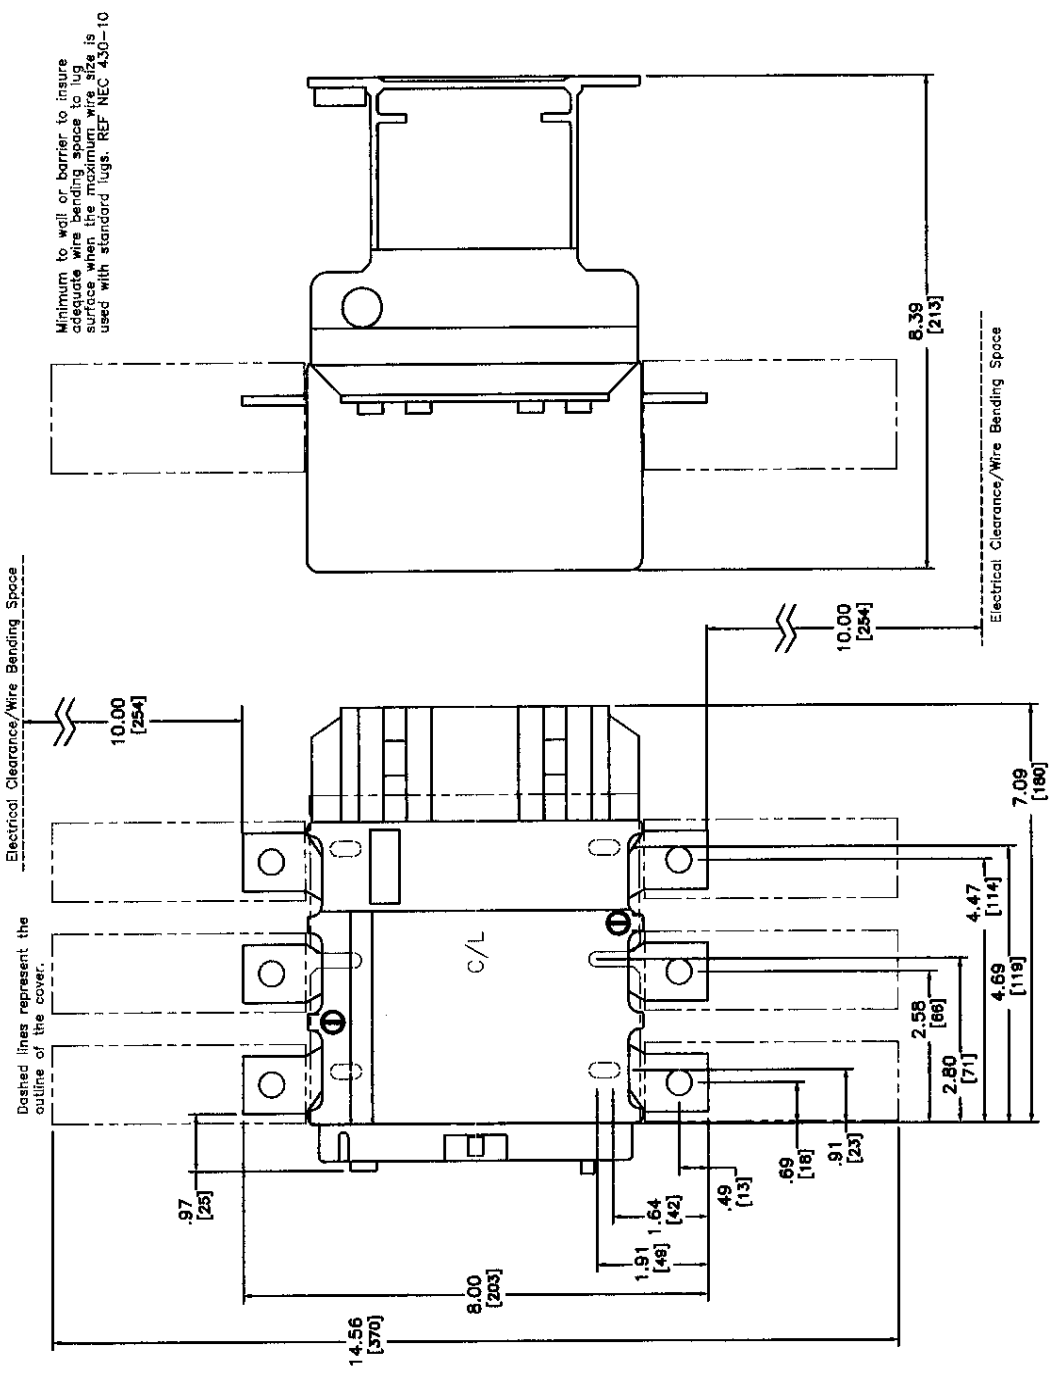

**EEC**  
Electrical and Electronic Controls, Inc.  
3850 Route 94  
Brewster, NY 10809 USA  
(845)-278-5777 Fax (845)-278-5444  
E-mail: info@eeccontrols.com  
www.eeccontrols.com

REV. **EEC 265-AC\_DC 0**  
Drawing No.

**Dimension Drawing**  
EEC265 AC/DC Operated

REV	DESCRIPTION	DATE	APP'D	DRAWN LR	DESCRIPTION
				CHECKED TG	
				APPROVED	
				DATE	08/23/07