


MAXIMUM HORSEPOWER RATINGS FOR 3 PHASE MOTORS

VOLTAGE (V)	200V	230V	460V	575V
HORSEPOWER	150	200	400	600
MAXIMUM CURRENT	INDUCTIVE (AC3) --- 500A			
	RESISTIVE (AC1) --- 700A			
AUXILIARY CONTACTS	NO --- 1*			
BUILT-IN	NC --- 0			

*THIS ONE NORMALLY OPEN HOLDING CIRCUIT CONTACT IS INCORPORATED IN THE DESIGN OF THE COIL.

COIL VOLTAGES FOR EEC 500 TO EEC 780

SUFFIX	VOLTAGE (VAC)	FREQUENCY (Hz)	DC VOLTAGE (VDC)
-A	120	50/60	
-C	208 - 230	60	
-E	480/400	60/50	
-F	600*	60	-DCN = 24VDC
-D	380	50	-DCI = 48VDC
-G	24**	50/60	-DCP = 120VDC
-H	277 - 280	60	-DCR = 220VDC

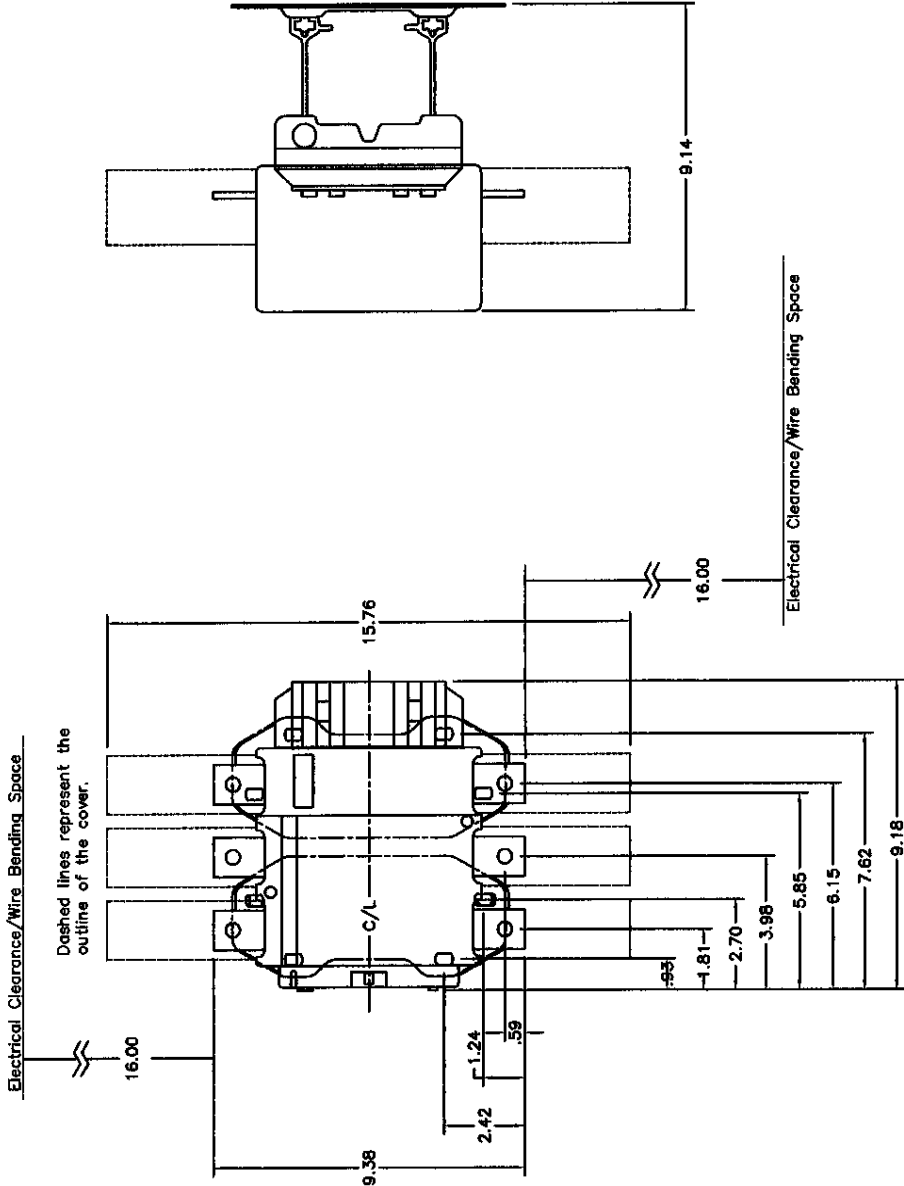

Electrical and Electronic Controls, Inc.
3881 Barnhart Rd.
P.O. Box 1777
08453-2777
Email: info@eeccontrols.com
www.eeccontrols.com

Dimension Drawing
EEC500 AC/DC Operated

Drawing No.

EEC 500-AC_DC 0

REV.

REV	DESCRIPTION	DATE	APP'D	DRAWN	LR	DESCRIPTION
				CHECKED	TG	
				APPROVED		
				DATE	08/23/07	