


XLS STARTERS

Dimension Drawings (in.)


AC operated *

DC operated *


XLS4K, XLS5K, XLS7K

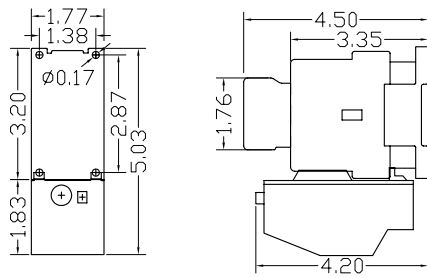


XLS4K, XLS5K, XLS7K

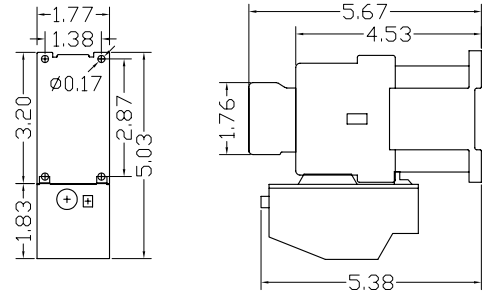


XLS11K

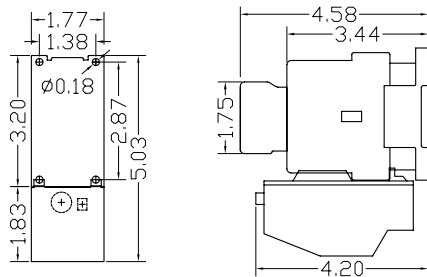


XLS11K

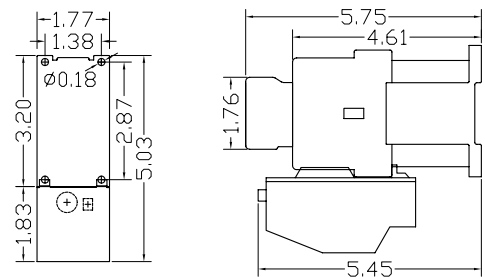


XLS15K, 18K

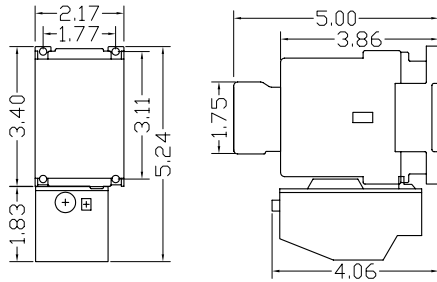


XLS15K, 18K

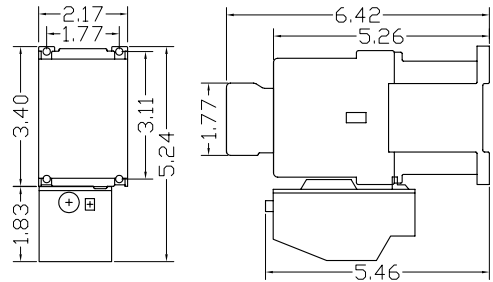


XLS22K, 30K, 37K

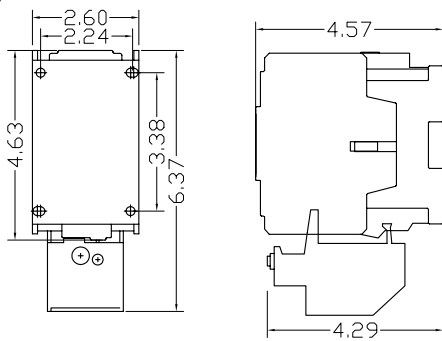


XLS22K, 30K, 37K

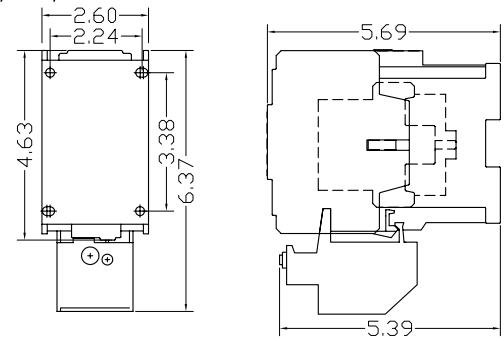

XLS45K, 55K

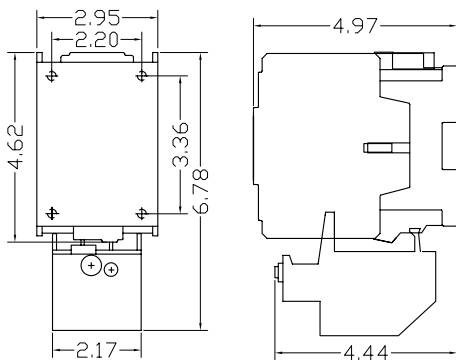

XLS45K, 55K

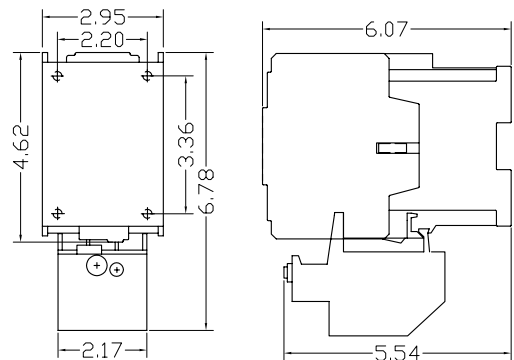

* Add 0.44 in. for Side-Mounted LK-HS8K Auxiliary Contact