


# Dimensions

## Extended Rotary Handle kit & Enclosed Breaker



### Rotary Handle Kit / Minimum / Maximum Depth

Handle Part Number	12" Shaft		24" Shaft
	Minimum Depth (A)	Max Depth (B)	Max Depth (C)
CBS-1RH -1,-4X	6"	14.1/2"	26.1/2"
CBS-2RH -2,-4X	6"	14.1/2"	26.1/2"
CBS-4RH -4,-4X	6.1/2"	15.1/2"	27.1/2"
CBS-8RH -8,-4X	8"	17"	29"

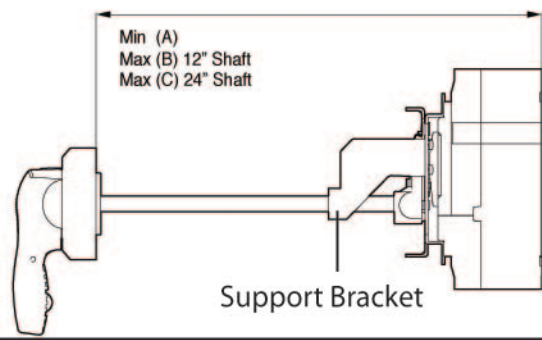

To obtain 6" Min. support bracket would **NOT** be used in installation.

(A) Dimension is the same minimum on **BOTH** 12" and 24" length shafts.

### Enclosed Circuit Breaker Dimensions

Breaker Type	Range in Amps	Enclosure Type					
		NEMA 1, 3R, 4/12			NEMA 4X (Non -Metal)		
		H	W	D	H	W	D
CBS-1*	15A-125A	12"	10"	8"	13.7"	11.9"	7.9"
CBS-2*	150A-250A	24"	20"	8"	25.6"	21.6"	9.9"
CBS-4*	300A-400A	36"	24"	8"	40.5"	30.5"	12"
CBS-8*	500A-800A	42"	24"	8"	52.5"	36.5"	12"

Above Enclosure dimensions are approx. (overall dimension)

Enclosure Material  
 NEMA 1, 3R, 12/4 - (Metallic)  
 NEMA4X - (Non-Metallic)

