30A Fusible Disconnect Switches

UL File # E245542

30A Fusible Disconnect

Class "CC" Fuse Block

Description	Part #	List Price
30A Fusible Disconnect w/ (11.8") Shaft and Type "SH" Handle	CC-30A-**	$132.00

**	Description
-RG	Red / Yellow Handle
-SS	Black Handle

	120V	208V	230V	460V	600V
Single Phase	2	5			
Three Phase		7.5	7.5	20	15

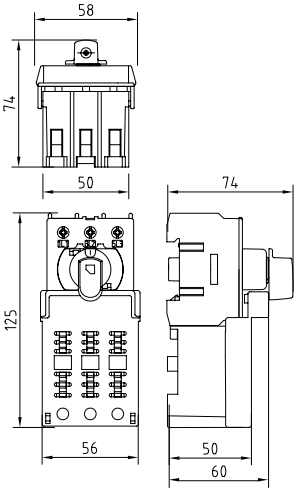



Hinged Cover Disconnects Fuses.

UL508

Shaft

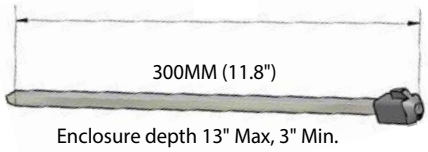

Enclosure depth 13" Max, 3" Min.

Part # CC - SHAFT
List $19

Auxilliary Contact

1 N.O. / 1 N.C.
Rated 16A form "C"

Part # AUX-KUIV
List $29

Handle Options

Padlockable NEMA 4X, up to 3 padlocks. (Safety Door Interlock)

22mm Single Hole Mount Design
Part # CC - SH - SS
List $29

4 Screw Mount Design
Part # CC - SS
List $25

Part # CC - SH - RG
List $29

Part # CC - RG
List $25



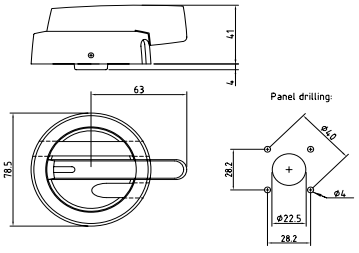

30A Fusible Disconnect (4X)

General Purpose Amps		Horsepower Rating / HP 1 Phase	3 Phase	Handle Color	Part Number	List Each	Dimensions mm/in H	W	
30A	110-120V AC	2	-	Red / Yellow	CC-30A - RG - 4X	$195	245	145	131
	208V AC	-	7.5						
	220-240V AC	5	7.5						
	277V AC	-	7.5						
	380-415V AC	-	15	Black	CC-30A - SS - 4X		9.6"	5.7"	5.2"
	440-480V AC	-	20						
	550-600V AC	-	15						

Fuse type required is "cc" rejection style. Fuses are not supplied with switch.

Discount Schedule ET